




# G80 ALLOY HOOK

www.ppse.com.my  
(603) 8964 5228

Alloy steel, quenched and tempered.  
Painted finish.  
Proof load tested 2 times the W.L.L.  
Minimum breaking load is 4 times the W.L.L.

Marked with manufacturer mark, W.L.L. and ID mark.  
Spare safety catch kits are available  
Larger sizes available on request.

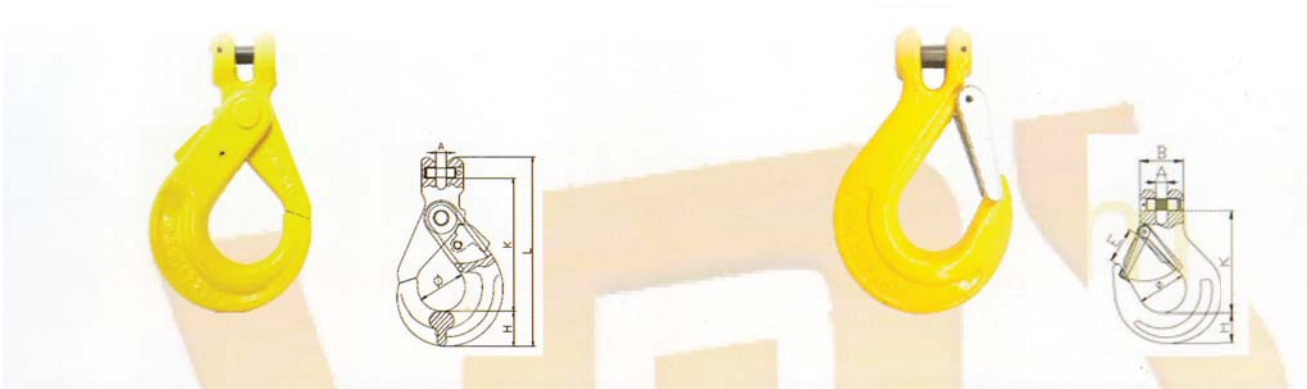


## G80 ALLOY CLEVIS SAFETY HOOK (SELF-LOCKING)

| CHAIN DIA. (mm) | W.L.L (ton) | A (mm) | H (mm) | K (mm) | L (mm) | Weight (lbs) |
|-----------------|-------------|--------|--------|--------|--------|--------------|
| 7/8             | 2           | 9.5    | 29.5   | 116.5  | 163    | 2.1          |
| 10              | 3.15        | 12     | 34.5   | 145    | 203    | 3.5          |
| 14              | 5.3         | 15     | 41.5   | 173    | 247    | 8.0          |
| 16              | 8           | 19.5   | 51.8   | 208    | 295    | 11.9         |

## G80 ALLOY CLEVIS SLING HOOK

| CHAIN DIA. (mm) | WLL (Ton) | R (mm) | A (mm) | B (mm) | T (mm) | WT (kgs) |
|-----------------|-----------|--------|--------|--------|--------|----------|
| 7/8             | 2         | 95     | 30     | 19     | 23     | 0.5      |
| 10              | 3.15      | 120    | 36     | 23     | 31     | 1.0      |
| 13              | 5.3       | 147    | 44     | 28     | 38     | 2.1      |
| 16              | 8         | 169    | 46     | 32     | 44     | 3.7      |
| 20              | 12.5      | 190    | 60     | 50     | 52     | 6.0      |

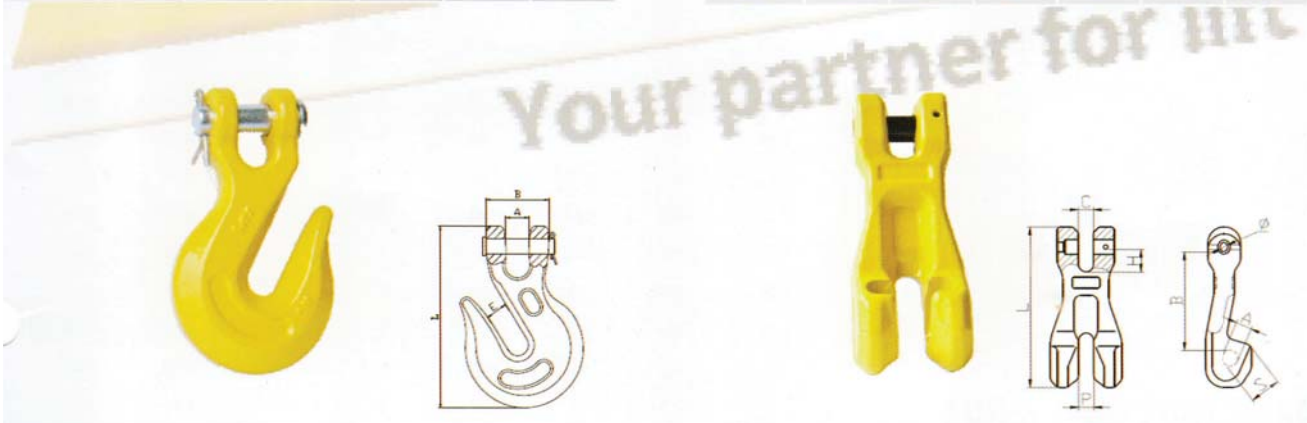

## G80 ALLOY CLEVIS GRAB HOOK

| CHAIN DIA. (mm) | WLL (TON) | A (mm) | B (mm) | E (mm) | L (mm) | Weight (lbs) |
|-----------------|-----------|--------|--------|--------|--------|--------------|
| 7/8             | 2.0       | 10     | 30     | 11     | 93     | 0.6          |
| 10              | 3.15      | 13     | 35     | 12     | 114    | 1.0          |
| 13              | 5.3       | 19     | 47     | 17     | 144    | 2.2          |
| 16              | 8         | 23     | 56     | 20     | 177    | 4.4          |
| 20              | 12.5      | 24     | 66     | 24     | 207    | 6.4          |

## G80 ALLOY CLEVIS SHORTENING CLUTCH

| CHAIN DIA. (mm) | WLL (TON) | P (mm) | C (mm) | A (mm) | B (mm) | H (mm) | S (mm) | L (mm) |
|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|
| 7/8             | 2.0       | 9.5    | 9.5    | 10.5   | 61.7   | 14     | 17     | 101    |
| 10              | 3.15      | 13     | 13     | 12.4   | 92     | 18.4   | 28     | 138    |
| 13              | 5.3       | 16.5   | 16.5   | 16     | 115    | 22.7   | 34.5   | 177    |
| 16              | 8         | 21     | 21     | 19.5   | 143    | 28.5   | 40     | 220    |
| 20              | 12.5      | 23.5   | 23.5   | 23     | 152    | 33.6   | 46     | 238    |

Powered by BESTEEL PTE LTD



For OSHA, ASME B30.9 and Manufacturer's Guidelines. Can fall if damaged, misused or overload. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect from contact with edges. DEATH or INJURY can occur from improper use or maintenance.





# G80 ALLOY HOOK

www.ppse.com.my  
(603) 8964 5228

Alloy steel, quenched and tempered.  
Painted finish.  
Proof load tested 2 times the W.L.L.  
Minimum breaking load is 4 times the W.L.L.

Marked with manufacturer mark, W.L.L. and ID mark.  
Spare safety catch kits are available  
Larger sizes available on request.



**G80 ALLOY EYE SWIVEL SAFETY HOOK (SELF-LOCKING)**

| WLL (T) | B (mm) | D (mm) | E (mm) | F (mm) | H (mm) | L (mm) | M (mm) | N (mm) |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1.12    | 34     | 27     | 20     | 16     | 35     | 162    | 38     | 63     |
| 2.0     | 31     | 33     | 26     | 20     | 45     | 188    | 38     | 63     |
| 3.15    | 40     | 44     | 35     | 27     | 58     | 228    | 47     | 79     |
| 5.4     | 50     | 54     | 41     | 30     | 71     | 285    | 58     | 96     |
| 8.0     | 65     | 66     | 53     | 35     | 84     | 337    | 72     | 120    |

**G80 ALLOY EYE SWIVEL HOOK**

| WLL (T) | A (mm) | B (mm) | E (mm) | F (mm) |
|---------|--------|--------|--------|--------|
| 1.0     | 113    | 30     | 25     | 20     |
| 1.5     | 134    | 33     | 35     | 24     |
| 2.0     | 150    | 40     | 42     | 26     |
| 3.0     | 160    | 40     | 42     | 28     |
| 8.0     | 240    | 56     | 60     | 44     |
| 12.0    | 280    | 62     | 62     | 51     |

Powered by BESTEEL PTE LTD



For OSHA, ASME B30.9 and Manufacturer's Guidelines. Can fall if damaged, misused or overload. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect from contact with edges. DEATH or INJURY can occur from improper use or maintenance.





# G80 ALLOY HOOK

www.ppse.com.my  
(603) 8964 5228

Alloy steel, quenched and tempered.  
Painted finish.  
Proof load tested 2 times the W.L.L.  
Minimum breaking load is 4 times the W.L.L.

Marked with manufacturer mark, W.L.L. and ID mark.  
Spare safety catch kits are available  
Larger sizes available on request.



**G80 ALLOY EYE SAFETY HOOK**

| W.L.L (TON) | H (mm) | K (mm) | L (mm) | Ø1 (mm) | Ø2 (mm) | WT (kgs) |
|-------------|--------|--------|--------|---------|---------|----------|
| 2.0         | 29.5   | 132    | 173    | 25      | 42      | 0.98     |
| 3.15        | 29.5   | 171    | 220.5  | 32.5    | 55      | 1.85     |
| 5.4         | 34.5   | 213    | 273.5  | 42      | 64      | 3.76     |
| 8.2         | 41.5   | 256    | 330    | 56      | 76      | 5.80     |

**G80 ALLOY EYE SLING HOOK**

| WLL (T) | A (mm) | A1 (mm) | G (mm) | H (mm) | O (mm) | R (mm) |
|---------|--------|---------|--------|--------|--------|--------|
| 1.12    | 25     | 25      | 14.5   | 20     | 20     | 80.5   |
| 2.0     | 29.5   | 25.5    | 19     | 27     | 27     | 95.5   |
| 3.15    | 30.5   | 30.5    | 23.5   | 33     | 33     | 120.5  |
| 5.4     | 43.5   | 41      | 29     | 40     | 40     | 150    |
| 8.0     | 52.5   | 50      | 35.5   | 49     | 49     | 183    |
| 12.5    | 62.5   | 60      | 42     | 55     | 55     | 217.5  |
| 15      | 76     | 75      | 51.5   | 62     | 62     | 225    |
| 20.6    | 80     | 71      | 55     | 67     | 67     | 250    |

Powered by BESTEEL PTE LTD



For OSHA, ASME B30.9 and Manufacturer's Guidelines. Can fall if damaged, misused or overload. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect from contact with edges. DEATH or INJURY can occur from improper use or maintenance.





# G80 ALLOY HOOK

www.ppse.com.my  
(603) 8964 5228

Alloy steel, quenched and tempered.  
Painted finish.  
Proof load tested 2 times the W.L.L.  
Minimum breaking load is 4 times the W.L.L.

Marked with manufacturer mark, W.L.L. and ID mark.  
Spare safety catch kits are available  
Larger sizes available on request.




## G80 ALLOY EYE HOOK

| W.L.L (tonnes) | E (mm) | H (mm) | K (mm) | M (mm) | N (mm) | L (mm) | WT (kgs) |
|----------------|--------|--------|--------|--------|--------|--------|----------|
| 1.0            | 22     | 20     | 82     | 16     | 75     | 112    | 0.3      |
| 1.5            | 24     | 21     | 94     | 17     | 80     | 126    | 0.4      |
| 2.0            | 25     | 26     | 105    | 21     | 96     | 143    | 0.6      |
| 3.0            | 27.5   | 28     | 119    | 23     | 100    | 163    | 0.9      |
| 5.0            | 35     | 37     | 146    | 33     | 120    | 204    | 1.8      |
| 7              | 44     | 46     | 186    | 38     | 157    | 255    | 3.8      |
| 11             | 51     | 57     | 232    | 46     | 182    | 317    | 6.8      |
| 15             | 57     | 70     | 260    | 55     | 223    | 360    | 10.6     |
| 22             | 75     | 76     | 318    | 68     | 262    | 434    | 15.3     |

## G80 LARGE OPEN HOOK

| W.L.L (ton) | A (mm) | B (mm) | c (mm) | L (mm) | R (mm) | E (mm) | H (mm) | WT (kgs) |
|-------------|--------|--------|--------|--------|--------|--------|--------|----------|
| 2.0         | 23     | 97     | 16     | 162    | 133    | 37     | 20.6   | 0.21     |
| 3.2         | 22     | 108    | 20.3   | 168    | 133.5  | 40     | 24     | 0.32     |

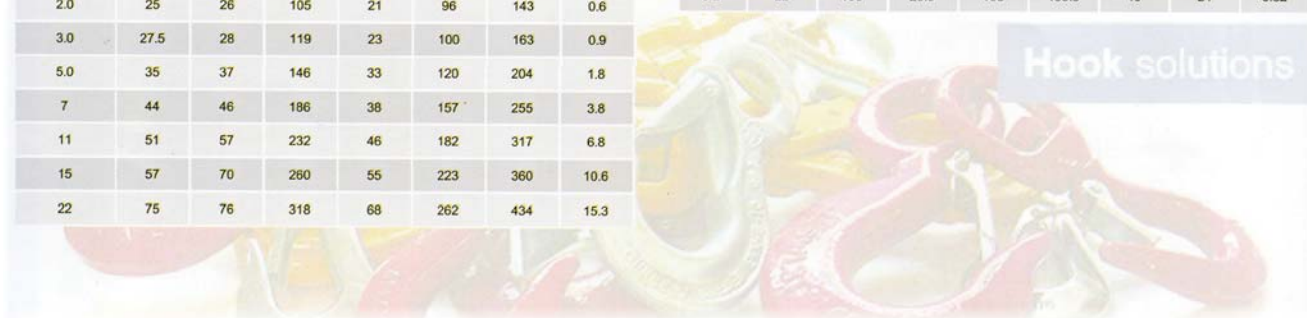

Hook solutions

Powered by BESTEEL PTE LTD



**WARNING**

For OSHA, ASME B30.9 and Manufacturer's Guidelines. Can fall if damaged, misused or overload. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect from contact with edges. DEATH or INJURY can occur from improper use or maintenance.