


SHACKLES

www.ppse.com.my
(603) 8964 5228

- U.S.Federal Specification RR-C-271D.
- Tempered, with alloy pins.
- Fatigue Tested.
- Hot Dip galvanized or Self Colored.
- Embossed with AMS logo, Traceability & WLL
- Proof Load at 2 times WLL
- Ultimate Strength at 6 times WLL.

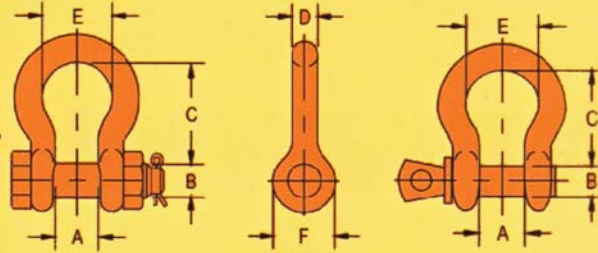

G209 BOW SCREW PIN

G2130 BOW BOLT & NUT

HOT DIP GALV'D SHACKLE (SCREW PIN & BOLT & NUT)

SIZE D (inch)	WLL (Ton)	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	WT SCREW PIN (kgs)	WT BOT & NUT (kgs)
1/4	0.5	13	8	29	20	17.5	0.05	0.06
5/16	0.75	13.5	9.5	30	21	21	0.09	0.11
3/8	1	17	11.2	36	26	25	0.14	0.16
7/16	1.5	18.5	12.7	42	29	27	0.18	0.23
1/2	2	20.6	15.8	47	32	31	0.33	0.40
5/8	3.25	27	19	60	43	40	0.63	0.77
3/4	4.75	32	22	71	51	48	1.07	1.24
7/8	6.5	37	25	84	58	54	1.60	1.80
1	8.5	43.5	28	96	68	60	2.30	2.60
1-1/8	9.5	48	32	109	75	68	3.30	3.80
1-1/4	12	53	35	120	83	76	4.40	5.30
1-3/8	13.5	59	38	133	92	84	6.00	7.00
1-1/2	17	62	42	148	99	92	7.85	9.30
1-3/4	25	74	50	177	126	106	13.00	15.00
2	35	83	56	192	138	122	20.00	23.00
2-1/2	55	105	70	266	180	145	38.50	43.00
3	85	127	83	330	190	166	-	70.00

Powered by BESTEEL PTE LTD



For OSHA, ASME B30.9 and Manufacturer's Guidelines. Can fall if damaged, misused or overload. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect from contact with edges. DEATH or INJURY can occur from improper use or maintenance.